

Features:



- Large emitting dot 1.9mm diameter.
- Low current operation.
- Easy mounting on P.C. boards or sockets.
- Wide viewing angle.
- Solid state reliability.
- Mechanically rugged.
- Pb free.
- RoHS compliant.

Descriptions:

- The NEM-757xAx series is a large emitting area (1.9mm diameter) LED sources configured in a 35 dot 5*7 matrix array.
- These devices are made with black surface and white segments.
- The Super Bright Red source color devices are made with AlGaInP Red Light Emitting Diod

Part No.: NEM-7571AD-11

Package Dimensions & Internal Circuit Diagram

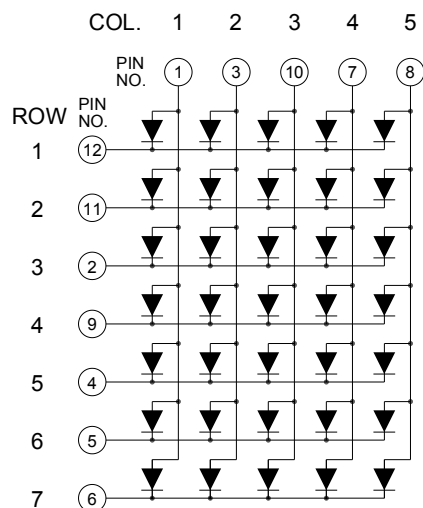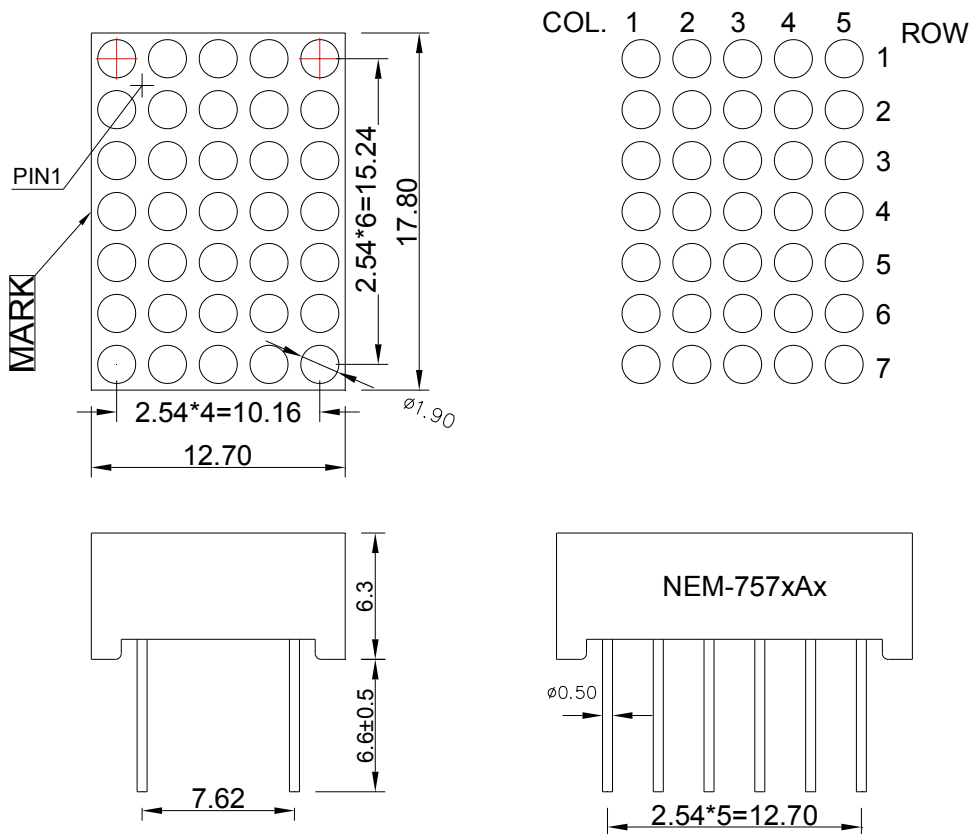

Notes:

1. All dimensions are in millimeters(inches),Tolerance is ± 0.25 (0.01") unless otherwise noted.
2. Specifications are subject to change without notice.

Absolute maximum ratings (Ta = 25°C)

| Parameter | Symbol | | Value | | Unit |
|-----------------------|--------|---------------------------------|-------|------|------|
| | | | Min. | Max. | |
| Reverse Voltage | VR | ---- | ---- | 5 | V |
| Forward Current | IF | ---- | ---- | 25 | mA |
| Power Dissipation | Pd | ---- | ---- | 60 | mW |
| Pulse Current | Ipeak | Duty=0.1mS, 1kHz | ---- | 80 | mA |
| Operating Temperature | Topr | ---- | -25 | +85 | °C |
| Storage Temperature | Tstr | ---- | -30 | +85 | °C |
| Solder Temperature | Tsol | 1/16inch below Seating plane | 260/3 | | °C/s |

Electrical and optical characteristics (Ta = 25°C)

| Parameter | Symbol | Test Condition | Values | | | Unit |
|--------------------------|--------|----------------|--------|------|------|------|
| | | | Min. | Typ. | Max. | |
| Forward Voltage | VF | IF=20mA | ---- | 1.9 | 2.3 | V |
| Reverse Current | IR | VR=5V | ---- | ---- | 30 | μA |
| Dominate Wavelength | λd | IF=20mA | ---- | 640 | ---- | nm |
| Peak Wavelength | λp | IF=20mA | ---- | 660 | ---- | nm |
| Spectral Line half-width | Δλ | IF=20mA | ---- | 20 | ---- | nm |
| Luminous Intensity | Iv | IF=10mA | ---- | 6000 | ---- | ucd |

Typical electrical/optical characteristic curves:

