

## Features:



- Large emitting dot 1.9mm diameter.
- Low current operation.
- Easy mounting on P.C. boards or sockets.
- Wide viewing angle.
- Solid state reliability.
- Mechanically rugged.
- Pb free.
- RoHS compliant.

## Descriptions:

- The NEM-757xAx series is a large emitting area (1.9mm diameter) LED sources configured in a 35 dot 5\*7 matrix array.
- These devices are made with black surface and white segments.
- The Super Bright Red source color devices are made with AlGaInP Red Light Emitting Diod

Part No.: NEM-7572AD-11

## Package Dimensions & Internal Circuit Diagram

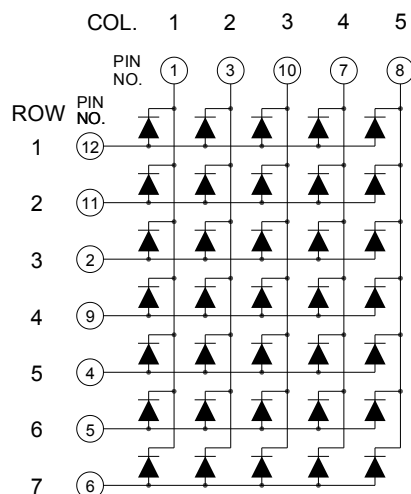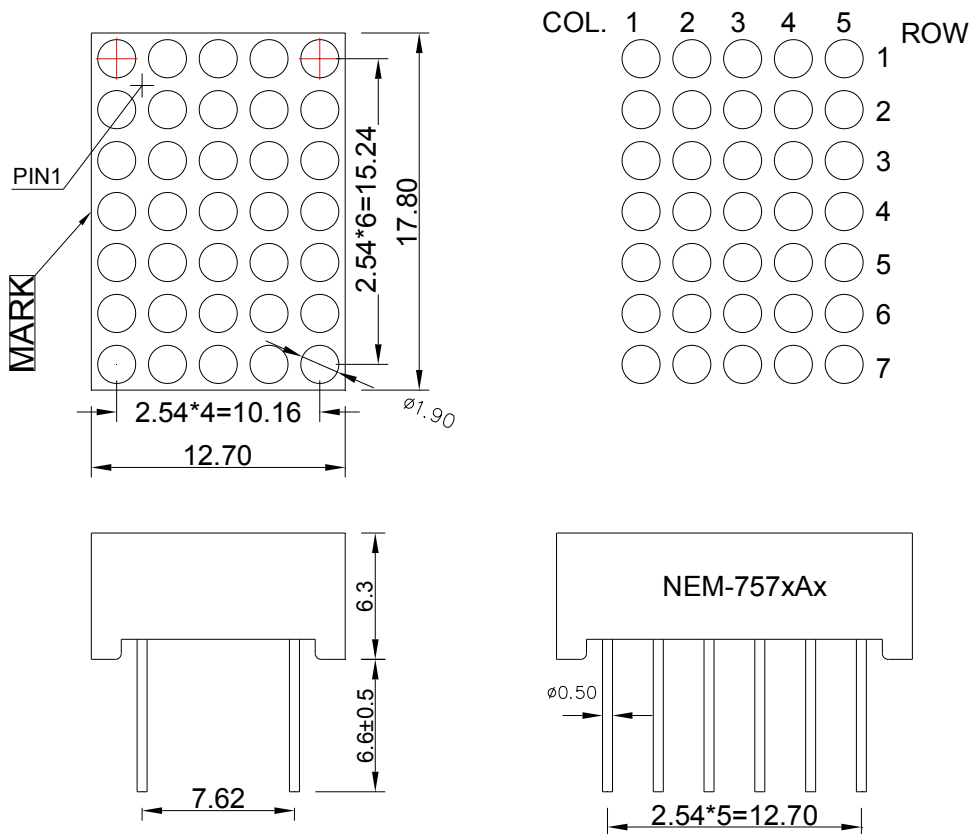

**Notes:**

1. All dimensions are in millimeters(inches),Tolerance is  $\pm 0.25$  (0.01") unless otherwise noted.
2. Specifications are subject to change without notice.

**Absolute maximum ratings (Ta = 25°C)**

Parameter	Symbol		Value		Unit
			Min.	Max.	
Reverse Voltage	VR	----	----	5	V
Forward Current	IF	----	----	25	mA
Power Dissipation	Pd	----	----	60	mW
Pulse Current	Ipeak	Duty=0.1mS, 1kHz	----	80	mA
Operating Temperature	Topr	----	-25	+85	°C
Storage Temperature	Tstr	----	-30	+85	°C
Solder Temperature	Tsol	1/16inch below Seating plane	260/3		°C/s

**Electrical and optical characteristics (Ta = 25°C)**

Parameter	Symbol	Test Condition	Values			Unit
			Min.	Typ.	Max.	
Forward Voltage	VF	IF=20mA	----	1.9	2.3	V
Reverse Current	IR	VR=5V	----	----	30	μA
Dominant Wavelength	$\lambda_d$	IF=20mA	----	640	----	nm
Peak Wavelength	$\lambda_p$	IF=20mA	----	660	----	nm
Spectral Line half-width	$\Delta \lambda$	IF=20mA	----	20	----	nm
Luminous Intensity	Iv	IF=10mA	----	6000	----	ucd

Typical electrical/optical characteristic curves:

